
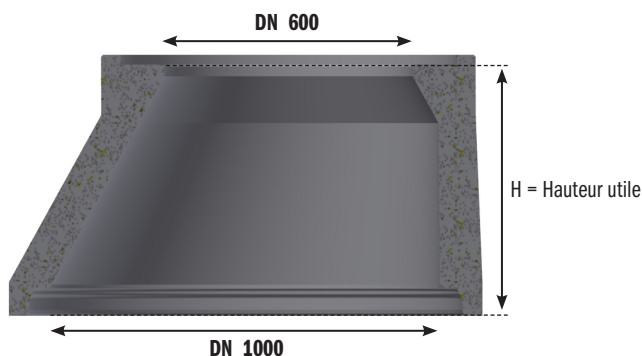


Caractéristiques :

- Béton selon usine de fabrication
- Possibilité béton XA2 ou XA3 sur demande à Chenon
- Longueur minimale d'élingage 1m
- SD = Sur demande

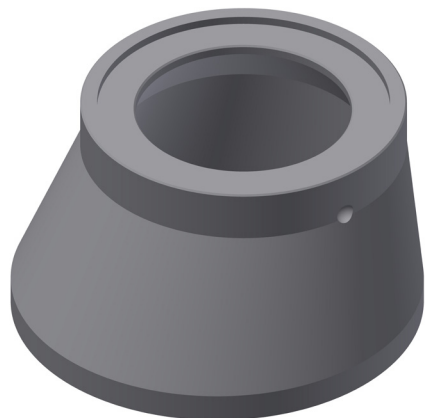

DÉFENSE DE PASSER SOUS LA CHARGE

USINES	Hauteur utile																	
		450	490	650	700	750	800	900	950	1000	1050	1100	1250	1300	1350	1400	1550	1850
Champagné (72)	Équipée	—	—	—	—	FAB01952	—	FAB01953	—	—	FAB01947	—	—	—	FAB01948	—	—	—
	Nue	—	FAB02010	—	—	SD	—	SD	—	—	SD	—	—	—	SD	—	—	—
Chenon (16)	Équipée	—	—	FAB01076	—	—	FAB01078	—	FAB01080	—	—	—	—	—	—	—	—	—
	Nue	—	—	FAB01075	—	—	FAB01077	—	FAB01079	—	—	—	—	—	—	—	—	—
Luçon (85)	Équipée	—	—	FAB01097	—	—	FAB01099	FAB01101	—	—	—	FAB01081	FAB01084	—	—	FAB01087	FAB01090	FAB01093
	Nue	—	—	FAB01098	—	—	FAB01100	FAB01102	—	—	—	FAB01082	FAB01085	—	—	FAB01088	FAB01091	FAB01094
Portet (31)	Équipée	SD	—	—	SD	—	—	—	—	SD	—	—	—	SD	—	—	—	—
	Nue	FAB01611	—	—	FAB01615	—	—	—	—	FAB01604	—	—	—	FAB01608	—	—	—	—
Poids en Kg		450	470	500	602	685	640	800	750	830	930	980	1100	1080	1080	1220	1340	1640

USINES	Ancres de Levage	Démoulage	Emboîtement	Béton
Champagné (72)	2 X 2T5	Immédiat	LM + Joint	XC3
Chenon (16)	2 X 1T3	Immédiat	L	XS3
Luçon (85)	2 X 1T3	Immédiat	L	XS3
Portet (31)	2 X 2T5	Immédiat	LO	XA3