
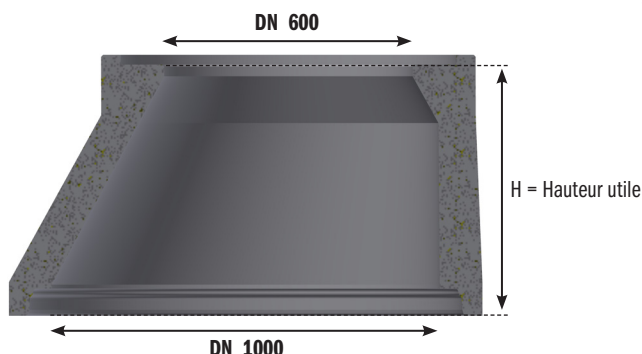


Caractéristiques :

- Béton selon usine de fabrication
- Possibilité béton XA2 ou XA3 sur demande à Chenon
- Longueur minimale d'élingage 1m
- SD = Sur demande

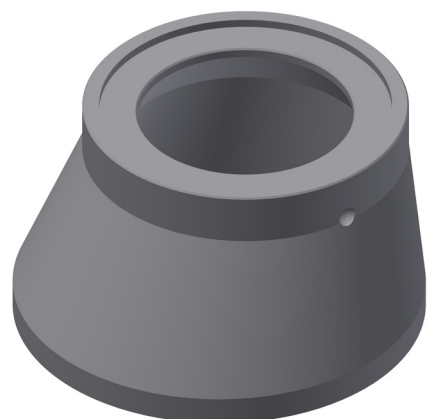

USINES	Hauteur utile																	
		450	490	650	700	750	800	900	950	1000	1050	1100	1250	1300	1350	1400	1550	1850
Champagné (72)	Équipée	—	—	—	—	FAB01952	—	FAB01953	—	—	FAB01947	—	—	—	FAB01948	—	—	—
	Nue	—	FAB02010	—	—	SD	—	SD	—	—	SD	—	—	—	SD	—	—	—
Chenon (16)	Équipée	—	—	FAB01076	—	—	FAB01078	—	FAB01080	—	—	—	—	—	—	—	—	—
	Nue	—	—	FAB01075	—	—	FAB01077	—	FAB01079	—	—	—	—	—	—	—	—	—
Luçon (85)	Équipée	—	—	FAB01097	—	—	FAB01099	FAB01101	—	—	—	FAB01081	FAB01084	—	—	FAB01087	FAB01090	FAB01093
	Nue	—	—	FAB01098	—	—	FAB01100	FAB01102	—	—	—	FAB01082	FAB01085	—	—	FAB01088	FAB01091	FAB01094
Portet (31)	Équipée	SD	—	—	SD	—	—	—	—	SD	—	—	—	SD	—	—	—	—
	Nue	FAB01611	—	—	FAB01615	—	—	—	—	FAB01604	—	—	—	FAB01608	—	—	—	—
Poids en Kg		450	470	500	602	685	640	800	750	830	930	980	1100	1080	1080	1220	1340	1640

USINES	Ancres de Levage	Démoulage	Emboîtement	Béton
Champagné (72)	2 X 2T5	Immédiat	LM + Joint	XC3
Chenon (16)	2 X 1T3	Immédiat	L	XS3
Luçon (85)	2 X 1T3	Immédiat	L	XS3
Portet (31)	2 X 2T5	Immédiat	LO	XA3